

# LENNTECH

B.V.

WATER- EN LUCHTBEDRIJVING  
 Rotterdamseweg 402M  
 2629 HH DELFT  
 the Netherlands  
 Telefon: (+31) 15 261.09.00  
 Telefax: (+31) 15 261.62.89  
 e-mail: [Info@lenntech.com](mailto:Info@lenntech.com)  
 internet: [www.lenntech.com](http://www.lenntech.com)

## TELEFAX MESSAGE

To:	<b>Bestwater</b>
	<b>Herrn Erdmann</b>
Afzn:	<b>Leistung der TW30-1812-75 Membran</b>
Fax no.:	<b>+49(0)30 755 12 48 11 / 12</b>
From:	<b>Stefanie Neisch</b>
Date:	<b>23/03/2007</b>
Number of pages, including this one:	<b>2</b>

If transmission has failed, please contact us as soon as possible.

Sehr geehrter Herr Erdmann,

Ich versuche hier kurz Ihre Fragen zu beantworten. Wie Sie aus dem Datenblatt entnehmen können handelt es sich hier bei um eine Umkehrosmosemembran zur Trinkwasseraufbereitung, also auch lebensmittelzugelassen. Die Rückhaltungsdaten besagen mindestens 96% Salzrückhaltung und im stabilisierten Zustand 98%. Die Rückhaltungstestergebnisse beziehen sich weiterhin auf enthartetes Wasser mit einer rel. geringen Leitfähigkeit (250 ppm).

Anbei habe ich Ihnen noch eine Übersichtstabelle über die verschiedenen Partikelgrößen und Membraneinsatzbereichen beigelegt. Hieraus ist ersichtlich, dass Bakterien viel zu groß sind, um eine Umkehrosmose zu passieren und Viren ebenfalls. Allerdings sind Bakterien und Viren im Gegensatz zu anderen Partikeln anpassungsfähig und werden selbst bei Reinstwassersystemen immer wieder auftauchen. Es können daher keine Garantien gegeben werden. Bei richtiger Anlage und Betriebsbedingungen werden jedoch im Prinzip keine Bakterien die Membran durchdringen.

Sollte ein bakterielles Problem vorhanden sein, so ist die Membran entweder beschädigt oder die Anlage oder der Prozess in irgendeiner Weise verantwortlich. Wir können Ihnen gerne dabei behilflich sein die Schwachstelle zu suchen oder Ihnen z.B. eine UV-anlage anbieten, um das Permeat noch einmal zu entkeimen. Diese werden auch bei Trinkwasseranlagen häufig nachgeschaltet. Ich hoffe Ihnen damit weitergeholfen zu haben.

Mit freundlichen Grüßen

Stefanie Neisch  
 LENNTech B.V.

**LENNTech** WATER TREATMENT AND AIR PURIFICATION**FILMTEC Membranes**

## FILMTEC Home Drinking Water RO Elements

**Features**

FILMTEC™ reverse osmosis (RO) membrane elements for home drinking water are the industry's most reliable. Advanced membrane technology and automated fabrication allow these elements to deliver consistent performance that equipment suppliers, water treatment dealers and residential customers can rely on. FILMTEC elements are shipped dry for convenient handling and long shelf-life. These elements are NSF/ANSI Standard 58 listed. Equipment suppliers can take advantage of FilmTec's Standard 58 listing and participation in the NSF Data Transfer Protocol to reduce costs for reduction claims for their systems.

FILMTEC home drinking water elements are rated at 60 psi and will purify about 20% more water than competitive elements rated at 60 psi (please see reference charts on page two for more information).


**Product Specifications**

Product	Part Number	Applied Pressure psig (bar)	Permeate Flow Rate gpd (l/h)	Stabilized Salt Rejection (%)
TW30-1812-24	93430	50 (3.4)	24 (3.8)	98
TW30-1812-36	80719	50 (3.4)	36 (5.7)	98
TW30-1812-50	80722	50 (3.4)	50 (7.9)	98
TW30-1812-75	114731	50 (3.4)	75 (12)	98

1. Permeate flow and salt rejection based on the following test conditions: 250 ppm softened tapwater, 77°F (25°C), 15% recovery and the specified applied pressure.

2. Minimum salt rejection is 98.0%.

3. Permeate flows for individual elements may vary +/-20%.

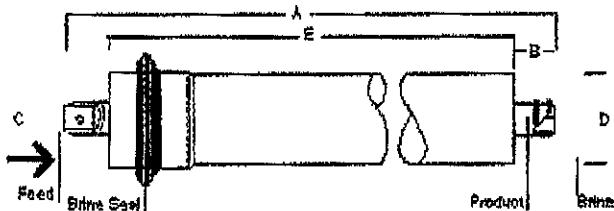**Figure 1****Dimensions – Inches (mm)**

Product	A	B	C	D	E
TW30-1812	11.74 (298)	0.87 (22)	0.68 (17)	1.73 (44.5)	10.0 (254)

1. TW30-1812 Home Drinking Water Elements fit nominal 2-inch I.D. pressure vessels.

1 inch = 25.4 mm

**Operating Limits**


- Membrane Type Polyamide Thin-Film Composite
- Maximum Operating Temperature 113°F (45°C)
- Maximum Operating Pressure 300 psig (21 bar)
- Maximum Feed Flow Rate 2.0 gpm (7.6 lpm)
- pH Range, Continuous Operation<sup>a</sup> 2 – 11
- pH Range, Short-Term Cleaning (30 min.)<sup>b</sup> 1 – 12
- Maximum Feed Silt Density Index (SDI) 5
- Free Chlorine Tolerance<sup>c</sup> <0.1 ppm

<sup>a</sup> Maximum temperature for continuous operation above pH 10 is 95°F (35°C).


<sup>b</sup> Refer to Cleaning Guidelines in specification sheet 609-23010.

<sup>c</sup> Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, FilmTec recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 609-22010 for more information.

**Figure 2. Impact of Pressure on Permeate Flow (constant temperature, recovery)**

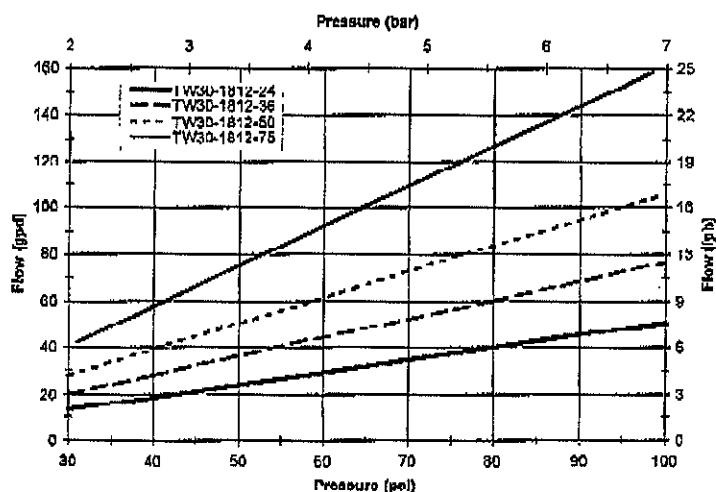

**Figure 3. Impact of Temperature on Permeate Flow (constant pressure, recovery)**

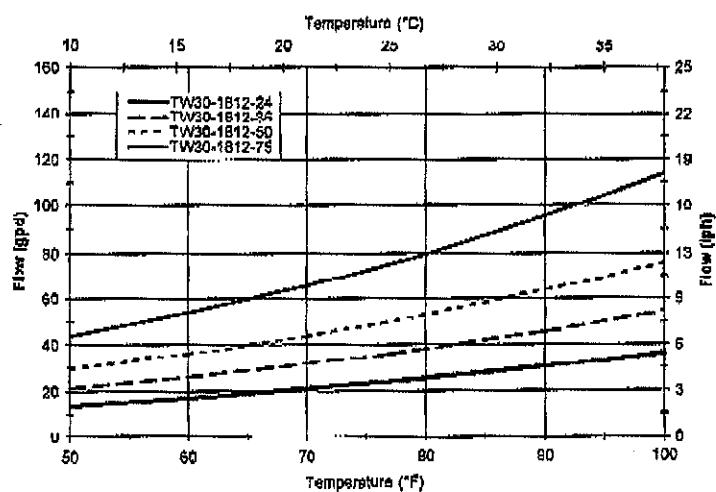

**General Information**

- The first full tank of permeate should be discarded. Do not use this initial permeate for drinking water or food preparation.
- Keep elements moist at all times after initial wetting.
- If operating limits and guidelines given in this bulletin are not strictly followed, the limited warranty will be null and void.
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The membrane shows some resistance to short-term attack by chlorine (hypochlorite). Continuous exposure, however, may damage the membrane and should be avoided.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements. Their use will void the element limited warranty.

